




ECE 104 Regulations

A brief guide to the ECE 104 regulations for your commercial vehicles

When using ECE 104 conspicuity tape, the following contour marking requirements should be observed for trucks exceeding 7.5 tons (N2 and N3) and trailers exceeding 3.5 tons (O3 and O4).

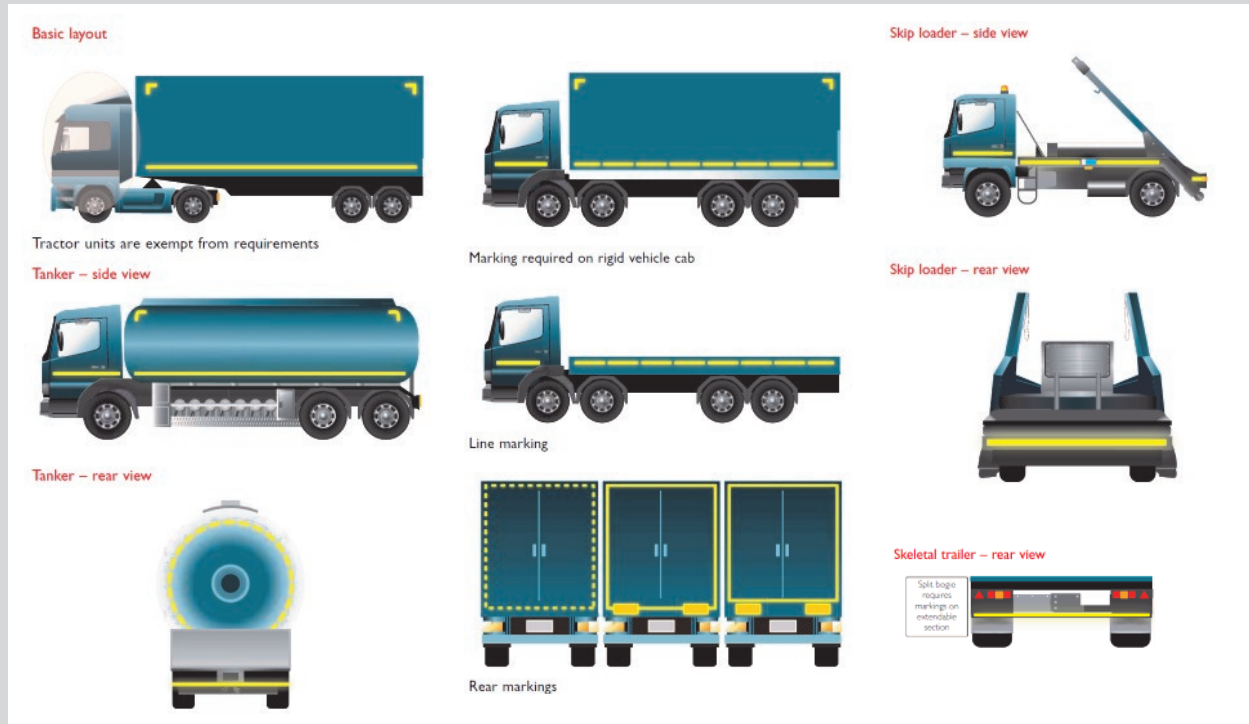

Rear

Full contour marking required. Only red or amber can be used. Conspicuity marking must be as close as possible to the edge of the vehicle. The cumulative length should also equate to 80% of the overall width of the vehicle, including marker boards.

Side

Full or partial contour marking required. Conspicuity marking must be as close as possible to the edge of the vehicle and reach within 600mm of the ends. The cumulative length should also equate to 80% of the overall length of the vehicle, excluding the length of the cab for motor vehicles and drawbar for trailers.

Lower elements

As low as possible, but within a range of not less than 250mm above ground and not more than 1500mm high.

Upper elements

As high as possible, but within 400mm of the upper extremity of the vehicle. For partial contour markings, each upper corner shall be described by two lines at 90 degrees of each other and at least 250mm in length.

Line marking

Permitted where the shape, structure, design or operation requirements make it impossible to comply with the mandatory guides.